

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions give complete satisfaction.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR SERIOUS PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- ✓ Maintain the stand in good condition, replace or repair damaged parts. Use recommended parts only. Non authorised parts may be dangerous and will invalidate the warranty.
- ✓ Before use ensure that all stand nuts, bolts and clamps are tight and that moveable and clamping parts are in good working order.
- ✓ Place stand on a sound, level surface offering adequate working clearance for its function.
- ✓ Keep area clean, tidy and free from unrelated materials. Ensure there is adequate lighting.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings, and other loose jewellery, and contain long hair.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non slip shoes.
- ✓ Keep children, pets and unauthorised persons away from the working area.
- x **DO NOT** use the stand for any purpose other than for which it is designed.
- x **DO NOT** get the stand wet or use in damp or wet locations or areas where there is condensation.
- ✓ When not in use, store the stand in a safe, dry, child proof area.
- ✓ Avoid damage to the bicycle frame and cables etc. when tightening clamps.
- x **DO NOT** exceed the maximum load of **30kg**.

NOTE: This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

2. INTRODUCTION

Heavy-duty cycle stand with adjustable work height. Ideal for home and workshop use. Fitted with articulated rubber coated frame clamp preventing damage to paintwork. Features four folding legs with a 1370mm span for added stability and multi-position tool tray to ensure tools are always close to hand. Adjustable cycle locking strap to prevent wheel movement available separately - order Model No. BS102S (see fig.3).

3. SPECIFICATION

Model No:BS103
Minimum Working Height:1050mm
Maximum Working Height:1750mm
Weight:6.2kg
Maximum Load:30kg
Cycle Frame Sizes:35mm to 65mm

4. ASSEMBLY / OPERATION

- 4.1. Unpack the contents, should there be anything damaged or missing contact your supplier.
 - 4.1.1. Release the quick release clamp (1) hold the tube (A) and push down on the clamp so that the legs spread out fully. Tighten the quick release clamp. The legs can be spread out less wide, but this may compromise the stability of the stand, depending on the position/weight of the cycle when mounted on the stand.
 - 4.1.2. Ensure the four feet (2) are placed flat on the floor surface, which should be stable and level. The stand can be permanently fixed to the floor if required.
 - 4.1.3. Insert the telescopic shaft (B) into tube (A) and lock into place.
 - 4.1.4. Attach the bike support clamp head (C) onto the telescopic bar.
 - 4.1.5. Attach the tool storage tray (D) to the tube (A) and tighten the two hex. bolts.
 - 4.1.6. Check all fixings for stability and adjust and/or re-tighten them if necessary.
 - 4.1.7. Lift a cycle onto the stand, making sure that it is mounted centrally for maximum stability and to avoid straining the clamp.
 - 4.1.8. Secure it on the stand by positioning the top frame tube into the clamp and tightening it using the quick release clamp (fig.2).
 - 4.1.9. To adjust the angle of the cycle, it is advisable to remove the cycle from the stand and to make the required adjustments. If adjusting with the cycle still mounted on the stand, it is recommended that two people are utilised. Release the adjustment clamp just enough so that the cycle can be moved to the required angle and then re-tighten the clamp.
 - 4.1.10. To hold the front wheel in the correct position, use BS102S (fig.3).
 - 4.1.11. Do not exceed the maximum extension height of shaft (B), there is a mark on the shaft.
 - 4.1.12. Always ensure that after repositioning the cycle on the stand, that the stand/ cycle are stable before carrying out any work.
 - 4.1.13. After use, clean the stand, if required, with warm water and then dry with a clean cloth. Store the stand in a safe, dry, child proof location.

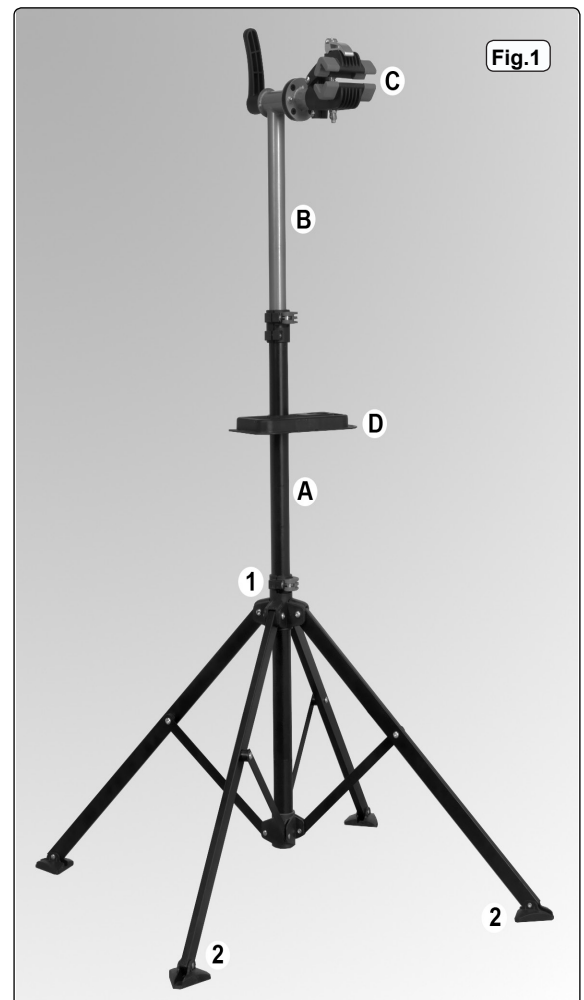




Fig.2



Fig.3

BS102S



Environmental Protection.

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycle centre and disposed of in a manner which is compatible with the environment.

Parts support is available for this product. To obtain a parts listing and/or diagram, please log on to www.sealey.co.uk, email sales@sealey.co.uk or telephone 01284 757500.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP32 7AR

01284 757500

01284 703534



www.sealey.co.uk



sales@sealey.co.uk