



MODE 2 10A TYPE 2 TO UK 3-PIN PLUG PORTABLE EV CHARGER - 5M CABLE

MODEL NO: **EVPC2**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Wear eye protection



Electrical shock hazard



Keep in dry area protect from rain



Warning

1. SAFETY

1.1. ELECTRICAL SAFETY

- ❑ **WARNING!** It is the user's responsibility to check the following:
Check all electrical equipment and appliances to ensure that they are safe before using. Inspect power supply leads, plugs and all electrical connections for wear and damage. Sealey recommend that an RCD (Residual Current Device) is used with all electrical products. You may obtain an RCD by contacting your local Sealey stockist.

If the product is used in the course of business duties, it must be maintained in a safe condition and routinely PAT (Portable Appliance Test) tested.

Electrical safety information: it is important that the following information is read and understood.

- 1.1.1. Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
- 1.1.2. Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.
- 1.1.3. **Important:** Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse - see fuse rating in these instructions.

- ✗ **DO NOT** pull or carry the appliance by the power cable.
- ✗ **DO NOT** pull the plug from the socket by the cable.
- ✗ **DO NOT** use worn or damaged cables, plugs or connectors. Ensure that any faulty item is repaired or replaced immediately by a qualified electrician.

- 1.1.4. This product is fitted with a BS1363/A 13 Amp 3 pin plug.
If the cable or plug is damaged during use, switch the electricity supply and remove from use.
Ensure that repairs are carried out by a qualified electrician.
Replace a damaged plug with a BS1363/A 13 Amp 3 pin plug. If in doubt contact a qualified electrician.

A) Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.

B) Connect the BROWN live wire to the live terminal 'L'.

C) Connect the BLUE neutral wire to the neutral terminal 'N'.

Ensure that the cable outer sheath extends inside the cable restraint and that the restraint is tight.

Sealey recommend that repairs are carried out by a qualified electrician.

1.2. GENERAL SAFETY

- ❑ **WARNING!** The charger **must not** be used in conjunction with an extension cord, timer or other accessory between wall outlet and charger.
- ❑ **WARNING!** Modern vehicles contain extensive electronic systems. You are required to check with the vehicle manufacturer, for any specific instructions regarding the use of this type of equipment on each vehicle. No liability will be accepted for damage / injury, where this product is not used in accordance with all instructions.

- ✗ **DO NOT** expose equipment to rain or moisture.
- ✗ **DO NOT** use if the cables, sockets or unit are damaged.
- ✗ **DO NOT** start using the equipment if the plugs, cables etc. are dirty or wet. Wipe clean with a dry cloth if necessary
- ✗ **DO NOT** place the equipment in the car or a confined place when charging.
- ✗ **DO NOT** expose the equipment to high temperatures.
- ✗ **DO NOT** clean the equipment with chemical cleaners.
- ✗ **DO NOT** use whilst under the influence of drugs, alcohol or intoxicating medication.
- ✗ **DO NOT** pull or carry the unit by its cables.
- ✗ **DO NOT** use this equipment to perform a task for which it is not designed.

- 1.2.1. The **Electricity At Work Act 1989** requires all portable electrical appliances, if used on business premises, to be tested by a qualified person, using a Portable Appliance Tester (PAT), at least once a year.

- 1.2.2. The **Health & Safety at Work Act 1974** makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of the appliance operator. If in any doubt about electrical safety, contact a qualified electrician.

- 1.2.3. Ensure that the insulation on all cables and the product itself is safe before connecting to the mains power supply.


- 1.2.4. Ensure that cables are always protected against short circuit and overload.

- 1.2.5. Regularly inspect power supply, leads, plugs for wear and damage and power connections to ensure that none is loose.

- 1.2.6. Check product voltage is the same as power supply to be used

- 1.2.7. Store the unit in a safe dry environment out of the reach of children.

- 1.2.8. This product does not contain user-serviceable parts, please do not try to repair or maintain the product on your own.

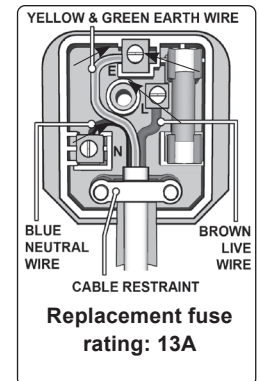

2. INTRODUCTION

Portable mode 2 charger simply plugs into a standard UK 3-pin socket for easy charging. Delay timing function enables users to program delayed start time to benefit from off peak electricity tariffs. The intuitive LED offers users fault codes, charging time, power and temperature displays. Supplied with storage case.


3. SPECIFICATION

Model No:..... EVPC2
 Electrical Class: 1ph
 Electrical Plug Type: 3-Pin BS
 EV Plug: Type 2
 Current: 10A Fixed
 Voltage: 230V
 Cable Length: 5m
 Cable Specification: EN50620-3*2.5mm²+2*0.5mm²
 IP Rating: IP54

4. OPERATION

4.1. LED STATE TABLE AND DISPLAY (fig.1)

| LED Screen | LED State | Fault Yellow | State Green | Charge Red |
|-------------------------|-----------------|--------------|-------------|------------|
| Rated Current | Ready | Off | On | Off |
| Voltage | EV Connected | Off | Slow flash | Off |
| Electricity consumption | CP Error | Off | Fast flash | Off |
| Charging time | Charging | Off | Pulse | On |
| Power | Charge complete | Off | Flash | Off |
| Constant current | Fault | Flash | Off | Off |

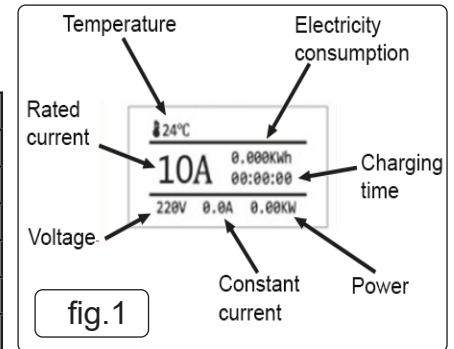


4.2. CHARGING

NOTE: Sealey strongly recommend that an RCD (Residual Current Device) is used with this unit. You may obtain an RCD by contacting your local Sealey stockist.

- 4.2.1. Plug Charger power cable into suitable power supply.
- 4.2.2. Remove rubber protection cover from Charger unit cable and fully insert relevant Charging Cable. Connect cable to EV vehicle.
- 4.2.3. Turn the mains power on and the LED interface will light up (fig.1).
- 4.2.4. While the equipment is charging, the red light will be permanently on and the green light will flash (fig.2).
- 4.2.5. When charging finishes, indicated by all LEDs being off, disconnect the unit from the power supply and disconnect the charging connector from the vehicle.

4.3. TIMER FUNCTION

- 4.3.1. With Charger powered up and disconnected from the EV vehicle, press the green button (fig.2) to set the delay time. One press equals one hour, up to a maximum delay of 10 hours.
- 4.3.2. After time delay is set, connect Charging Cable to charging port on EV vehicle.
- 4.3.3. When charging finishes, indicated by all LEDs being off, disconnect the unit from the power supply and disconnect the charging connector from the vehicle.

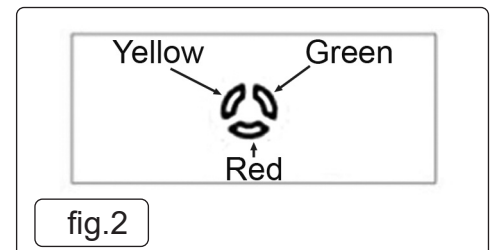

5. MAINTENANCE

- **WARNING!** Disconnect from Mains supply before performing any cleaning or maintenance.
- 5.1. Cleaning and user maintenance should be carried out by competent persons.
 - 5.2. After use and before performing maintenance, unplug and disconnect the battery charger.
 - 5.3. Use a dry cloth to wipe all battery corrosion and other dirt or oil from the battery connectors, cords, and the charger case.
 - 5.4. Ensure that all of the charger components are in place and in good working condition.
 - 5.5. Servicing does not require opening the unit, as there are no serviceable parts.
 - 5.6. All other servicing should be performed by qualified service personnel.
 - 5.7. If the mains cable is damaged, **DO NOT** use until repaired.
 - 5.8. Store in supplied storage case inside a cool, dry place.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk