

INSTRUCTIONS FOR: BATTERY TERMINAL CRIMPING TOOL

Model No: **AK422**

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THE TOOL CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS


- ❑ **WARNING!** Ensure Health and Safety, local authority and general workshop practice regulations are adhered to when using tools.
- ✗ **DO NOT** use tools if damaged.
- ✓ Wear approved eye protection. A full range of personal safety equipment is available from your Sealey dealer.
- ✓ Wear suitable clothing to avoid snagging. Do not wear jewellery and tie back long hair.
- ✓ Maintain tool in good and clean condition for best and safest performance.
- ✓ When not in use, clean and lubricate tool, and store in a safe, dry, childproof location.
- ❑ **IMPORTANT:** This manual is provided as a guide only, refer to the vehicle manufacturer's service instructions, or a proprietary manual, to establish the current procedure and data.
- ❑ **WARNING!** Failure to heed safety and warning instructions may result in damage and/or personal injury and will invalidate the warranty.
- ❑ **WARNING!** The warnings, cautions and instructions referred to in this manual cannot cover all possible conditions and situations that may occur. It must be understood that common sense and caution are factors which cannot be built into this product, but must be applied by the operator.

2. INTRODUCTION

A quick and effective way of crimping battery terminals using either a hammer or vice. Wide throat and spring controlled punch securely holds terminal in place for added security. Compatible with battery terminals with a cross sectional area of 6, 10, 16, 25, 35 and 50mm².

3. OPERATION

- 3.1. Select the appropriate sized terminal to fit the cable being worked on. Strip off cable insulation to a length approximately 3mm longer than the length of the terminal barrel.
- 3.2. Insert stripped cable fully into battery terminal (or connector). Lift ram of tool and place terminal on anvil so bottom of ram rests on the middle of terminal barrel.
- 3.3. Strike ram with a hammer (or put tool in a vice and tighten) until the line on the ram corresponds to the cable size used and is even with the top of the tool.

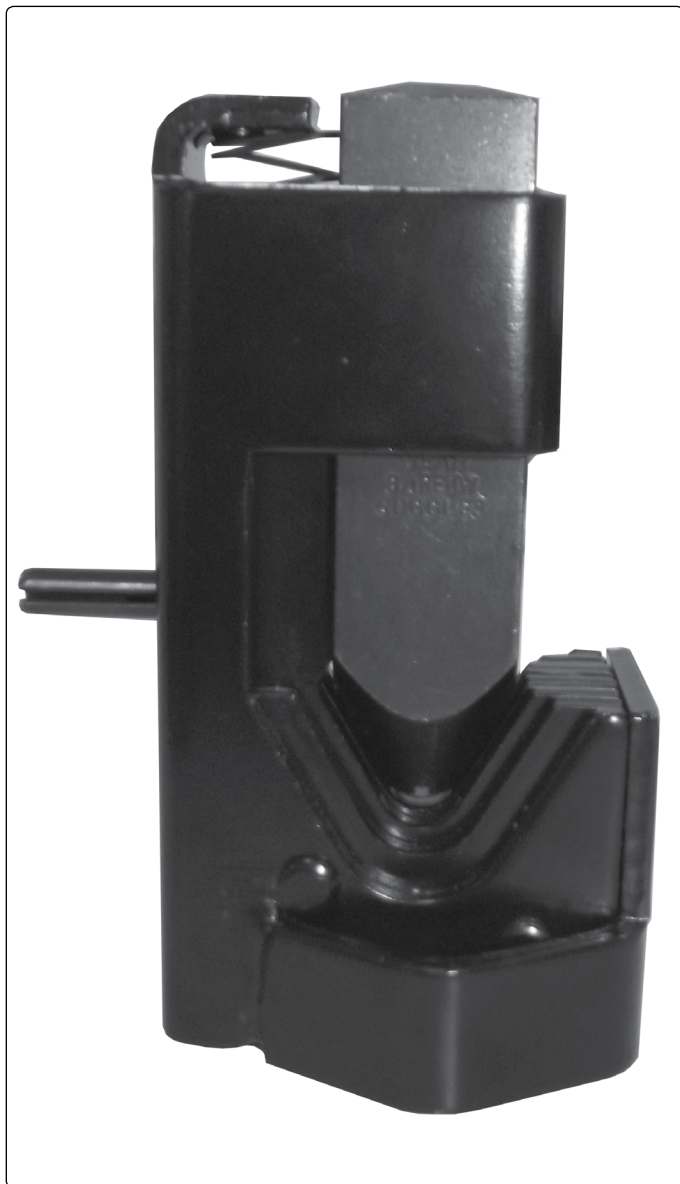

Environmental Protection.
Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycle centre and disposed of in a manner which is compatible with the environment.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.

